


Model # 21A2ZV45G

2-way, direct acting, normally open solenoid valve

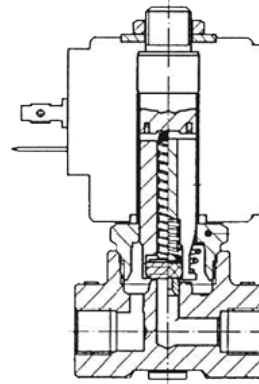

| | | | | | |
|---------------------------------|--|---|------------------------------|---------------------------------|---------------------------------------|
| 1/4" Pipe Size (Inch) | 3/16" Orifice Size (Inch) | 0.45 Flow Factor (CV) | 14 Watt Rating (W) | 0 Min. Pressure (PSI) | 85/85 Max. Pressure (AC/DC) |
| FKM Sealing Material | 14° - 280° F Temperature Range | Air, Inert gas, Water, Synthetic oils Medium Examples | | | |

Materials of Construction

| | |
|----------------|----------------------------|
| Body: | Brass |
| Armature Tube: | Stainless Steel 300 |
| Fixed Core: | Stainless Steel 400 |
| Plunger: | Stainless Steel 400 |
| Spring: | Stainless Steel 300 |
| Shading Ring: | Copper |
| Orifice: | Brass |

Electrical Connection


| | |
|--------------------------|---------------------|
| Rating: | NEMA 4 |
| Strain Relief Connector: | Model 009 |
| 1/2" Conduit Connector: | Model 010 |
| 6 ft. Power Cord: | Model GRN100 |
| Inrush VA: | 43 |
| Holding VA: | 27 |

Spare Parts

| | |
|------|--------------------|
| Kit: | KT130ZV55-G |
|------|--------------------|

Valve Dimensions

| | |
|------------------|----------------|
| Valve Width(A): | 1 3/32" |
| Valve Length(B): | 1 5/8" |
| Valve Height(C): | 3 1/16" |
| Coil Width(D): | 2 1/16" |
| Coil Length(E): | 2 5/32" |
| Coil Length(F): | 2 5/8" |

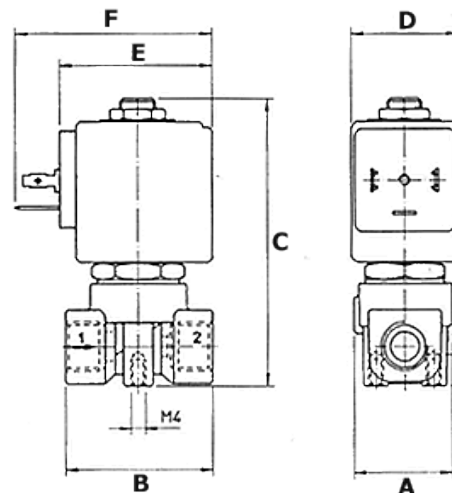

Note: Valve is pictured above with a sample coil, which may or may not reflect the exact specifications of this particular build.