


Model # 21L2K1T40

2-way, direct acting, normally closed solenoid valve

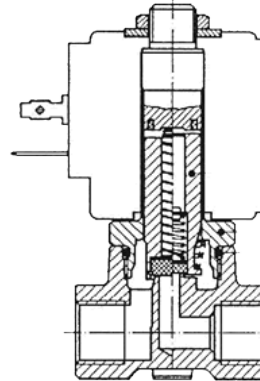

1/4" Pipe Size (Inch)	5/32" Orifice Size (Inch)	0.35 Flow Factor (CV)	8 Watt Rating (W)	0 Min. Pressure (PSI)	85/25 Max. Pressure (AC/DC)
PTFE Sealing Material	-40°- 360° F Temperature Range	Steam, Hot water, Chemicals* Medium Examples			

*Must be compatible with 316SS and PTFE

Materials of Construction

Body:	Stainless Steel 316
Armature Tube:	Stainless Steel 300
Fixed Core:	Stainless Steel 400
Plunger:	Stainless Steel 400
Spring:	Stainless Steel 300
Shading Ring:	Gold-plated Copper
Orifice:	Stainless Steel 316

Electrical Connection


Rating:	NEMA 4
Strain Relief Connector:	Model 009
1/2" Conduit Connector:	Model 010
6 ft. Power Cord:	Model GRN100
Inrush VA:	25
Holding VA:	14.0

Spare Parts

Kit:	KT130KT55-H
------	--------------------

Valve Dimensions

Valve Width(A):	1 3/32"
Valve Length(B):	1 5/8"
Valve Height(C):	3 1/16"
Coil Width(D):	1 3/16"
Coil Length(E):	1 21/32"
Coil Length(F):	2 1/8"

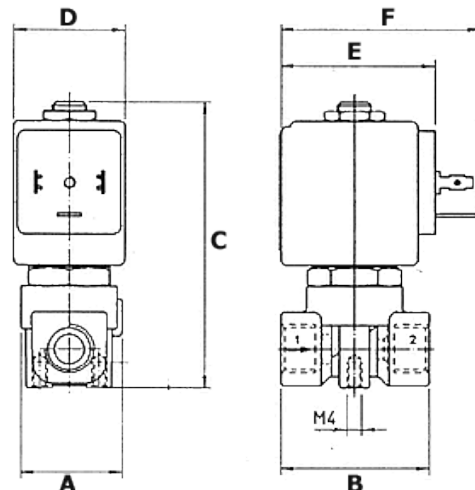

Note: Valve is pictured above with a sample coil, which may or may not reflect the exact specifications of this particular build.