


### Model # 21L2K1T40

2-way, direct acting, normally closed solenoid valve

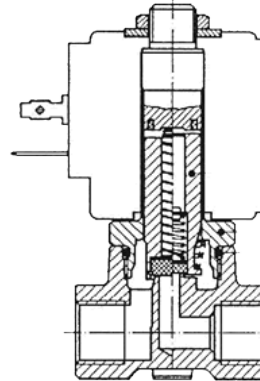

<b>1/4"</b> Pipe Size (Inch)	<b>5/32"</b> Orifice Size (Inch)	<b>0.35</b> Flow Factor (CV)	<b>12</b> Watt Rating (W)	<b>0</b> Min. Pressure (PSI)	<b>220/85</b> Max. Pressure (AC/DC)
<b>PTFE</b> Sealing Material	<b>-40°- 360° F</b> Temperature Range	<b>Steam, Hot water, Chemicals*</b> Medium Examples			

\*Must be compatible with 316SS and PTFE

#### Materials of Construction

Body:	<b>Stainless Steel 316</b>
Armature Tube:	<b>Stainless Steel 300</b>
Fixed Core:	<b>Stainless Steel 400</b>
Plunger:	<b>Stainless Steel 400</b>
Spring:	<b>Stainless Steel 300</b>
Shading Ring:	<b>Gold-plated Copper</b>
Orifice:	<b>Stainless Steel 316</b>

#### Electrical Connection


Rating:	<b>NEMA 4</b>
Strain Relief Connector:	<b>Model 009</b>
1/2" Conduit Connector:	<b>Model 010</b>
6 ft. Power Cord:	<b>Model GRN100</b>
Inrush VA:	<b>36</b>
Holding VA:	<b>23</b>

#### Spare Parts

Kit:	<b>KT130KT55-H</b>
------	--------------------

#### Valve Dimensions

Valve Width(A):	<b>1 3/32"</b>
Valve Length(B):	<b>1 5/8"</b>
Valve Height(C):	<b>3 1/16"</b>
Coil Width(D):	<b>1 7/16"</b>
Coil Length(E):	<b>1 29/32"</b>
Coil Length(F):	<b>2 3/8"</b>

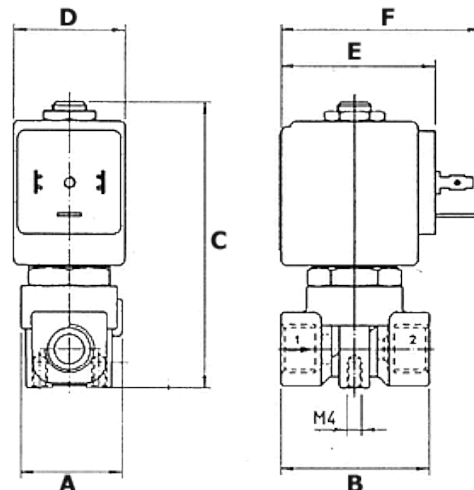

**Note:** Valve is pictured above with a sample coil, which may or may not reflect the exact specifications of this particular build.