


## H5U29-00E-13




Series H, normally closed, direct lift, 2-way solenoid valve with brass body and 3/4" connections

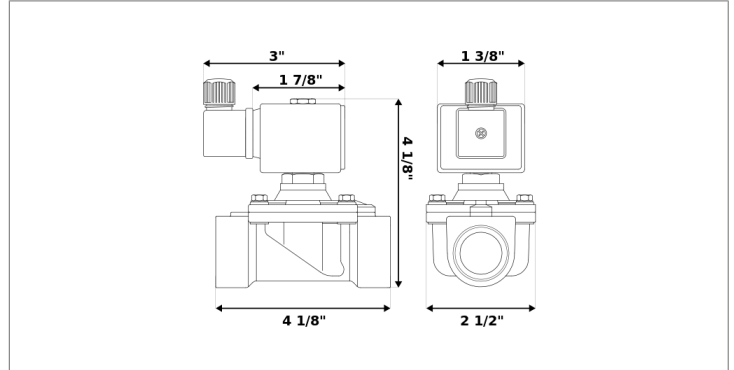

Valve	
Pipe size:	3/4" NPT
Operating pressure:	0–20 psi
Flow coefficient:	4.6 Cv
Media temperature:	15–280 °F
Ambient temperature:	15–105 °F
Suggested usage:	Water, steam
Operation:	2-way, normally closed solenoid valve
Mechanism:	Direct lift
Manual override:	No
Pipe gender:	Female
Orifice size:	3/4"
Design pressure:	230 psi
Vacuum rating:	0.001 Torr
Media viscosity:	12 cSt

Materials	
Body:	Brass
Seal:	EPDM rubber (EPDM)
Orifice:	Brass
Core tube:	Stainless steel 300
Fixed core:	Stainless steel 400
Plunger:	Stainless steel 400
Spring:	Stainless steel 300
Shading ring:	Copper

Electrical	
Power:	24 V dc
Wattage:	12 W
Connection:	Cable gland (6–8 mm)
Consumption:	0.50 A
Voltage tolerances:	+10% -5%
Coil inner diameter:	1/2"
Coil molding:	Polyamide (PA)
Coil rating:	15–310 °F (Class F)
Duty cycle:	Continuous, 100% ED
Enclosure:	NEMA 4, IP65

Accessories		
REPAIR KIT	CORE TUBE	COIL/CONNECTOR
RK-H0E2	AT-H091	C-U29
		
<ul style="list-style-type: none"> <li>O-rings (2 ea.)</li> <li>Plunger and diaphragm assembly</li> </ul>	<ul style="list-style-type: none"> <li>Core tube</li> </ul>	<ul style="list-style-type: none"> <li>24 V dc electrical coil</li> <li>Cable gland connector</li> </ul>

See this part online:



[granzow.com](http://granzow.com)