


H7H29-00E

Series H, normally closed, direct lift, 2-way solenoid valve with brass body and 1 1/4" connections

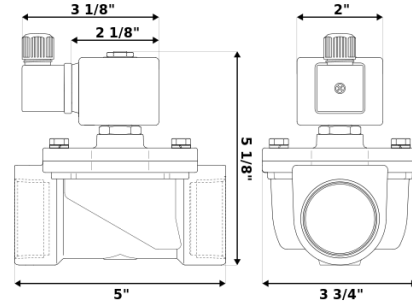

Valve

Pipe size:	1 1/4" NPT
Operating pressure:	0–85 psi
Flow coefficient:	19 Cv
Media temperature:	15–280 °F
Ambient temperature:	-5–140 °F
Suggested usage:	Water, steam
Operation:	2-way, normally closed solenoid valve
Mechanism:	Direct lift
Manual override:	No
Pipe gender:	Female
Orifice size:	1 3/8"
Design pressure:	230 psi
Vacuum rating:	0.001 Torr
Media viscosity:	12 cSt




Materials

Body:	Brass
Seal:	EPDM rubber (EPDM)
Orifice:	Brass
Core tube:	Stainless steel 300
Fixed core:	Stainless steel 400
Plunger:	Stainless steel 400
Spring:	Stainless steel 300
Shading ring:	Copper

Electrical

Power:	24 V dc
Wattage:	14 W
Connection:	Cable gland (6–8 mm)
Consumption:	0.58 A
Voltage tolerances:	+10% -5%
Coil inner diameter:	1/2"
Coil molding:	Polyethylene (PET)
Coil rating:	-5–355 °F (Class H)
Duty cycle:	Continuous, 100% ED
Enclosure:	NEMA 4, IP65

Accessories

REPAIR KIT	CORE TUBE	COIL/CONNECTOR
RK-H0E4	AT-H091	C-H29
		
<ul style="list-style-type: none">• O-ring• Plunger and diaphragm assembly	<ul style="list-style-type: none">• Core tube	<ul style="list-style-type: none">• 24 V dc electrical coil• Cable gland connector

See this part online:



H7H29-00E

granzow.com