


## X5B19-00T

Series X, normally closed, pilot operated, 2-way solenoid valve with stainless steel 316 body and 3/4" connections

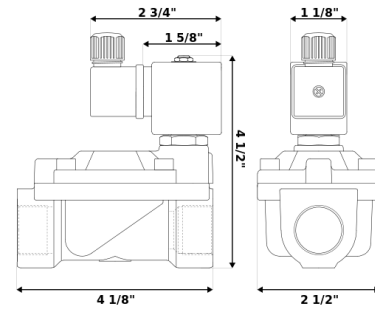

### Valve

Pipe size:	G 3/4"
Operating pressure:	8–150 psi
Flow coefficient:	8.4 Cv
Media temperature:	140–355 °F
Ambient temperature:	-5–140 °F
Suggested usage:	Steam, hot water, chemicals
Operation:	2-way, normally closed solenoid valve
Mechanism:	Pilot operated
Manual override:	No
Pipe gender:	Female
Orifice size:	3/4"
Design pressure:	320 psi
Media viscosity:	12 cSt

### Materials

Body:	Stainless steel 316
Seal:	Polytetrafluoroethylene (PTFE)
Orifice:	Stainless steel 316
Core tube:	Stainless steel 300
Fixed core:	Stainless steel 400
Plunger:	Stainless steel 400
Spring:	Stainless steel 300
Shading ring:	Gold-plated copper

### Electrical

Power:	120 V ac
Connection:	Cable gland (6–8 mm)
Holding:	15 VA
Inrush:	25 VA
Voltage tolerances:	+10% -15%
Coil inner diameter:	1/2"
Coil molding:	Polyethylene (PET)
Coil rating:	-5–355 °F (Class H)
Duty cycle:	Continuous, 100% ED
Enclosure:	NEMA 4, IP65

### Accessories

REPAIR KIT	CORE TUBE	COIL/CONNECTOR
RK-X0T2	AT-H0T1	C-B19
<ul style="list-style-type: none"><li>• Diaphragm</li><li>• Sealing ring</li><li>• O-rings (2 ea.)</li><li>• Plunger</li><li>• Spring</li></ul>	<ul style="list-style-type: none"><li>• Core tube</li><li>• Plunger</li><li>• O-ring</li></ul>	<ul style="list-style-type: none"><li>• 120 V ac electrical coil</li><li>• Cable gland connector</li></ul>

See this part online:



[X5B19-00T](#)

[granzow.com](http://granzow.com)